

TECHNICAL DATA

Cooling capacity R404A/507 ($t_e = -8^{\circ}\text{C}$; $DT1=10\text{K}$):	750 W
Exchange surface:	3,29 m ²
Tube volume:	0,84 dm ³
Air flow:	322 m ³ /h
Air throw:	1,64 m
Gas coil connection:	9,52 Φ mm
Liquid coil connection:	9,52 Φ mm
Weight:	5,4 kg

FANS


Diameter:	120 Φ mm
Number of fans:	2
Voltage:	230/50 V/Hz
Power:	40 W
Current:	0,26 A

THE CORRECTION FACTORS

Tevap.[°C] / DT1[K]	14	13	12	11	10	9	8	7	6
5	1,594	1,558	1,451	1,308	1,166	0,987	0,808	0,630	0,523
4	1,587	1,544	1,444	1,295	1,143	0,966	0,801	0,624	0,519
3	1,580	1,529	1,437	1,280	1,120	0,944	0,794	0,618	0,516
2	1,572	1,515	1,430	1,265	1,097	0,923	0,787	0,613	0,512
1	1,565	1,501	1,423	1,251	1,074	0,901	0,780	0,607	0,509
0	1,558	1,487	1,416	1,237	1,051	0,880	0,773	0,601	0,505
-5	1,523	1,434	1,427	1,166	1,019	0,855	0,732	0,580	0,487
-8	1,501	1,402	1,313	1,123	1,000	0,840	0,707	0,567	0,476
-10	1,487	1,380	1,237	1,094	0,987	0,830	0,691	0,558	0,469
-15	-	1,309	1,178	1,041	0,961	0,795	0,672	0,551	0,461
-20	-	1,237	1,118	0,987	0,934	0,763	0,652	0,544	0,454
-25	-	-	1,058	0,951	0,907	0,731	0,633	0,537	0,448
-30	-	-	-	-	0,880	0,699	0,613	0,530	0,440
-35	-	-	-	-	-	0,666	0,594	0,523	0,433

DIMENSIONS

A:	440 mm
B:	505 mm
C:	418 mm
D:	456 mm
E:	80 mm
F:	120 mm

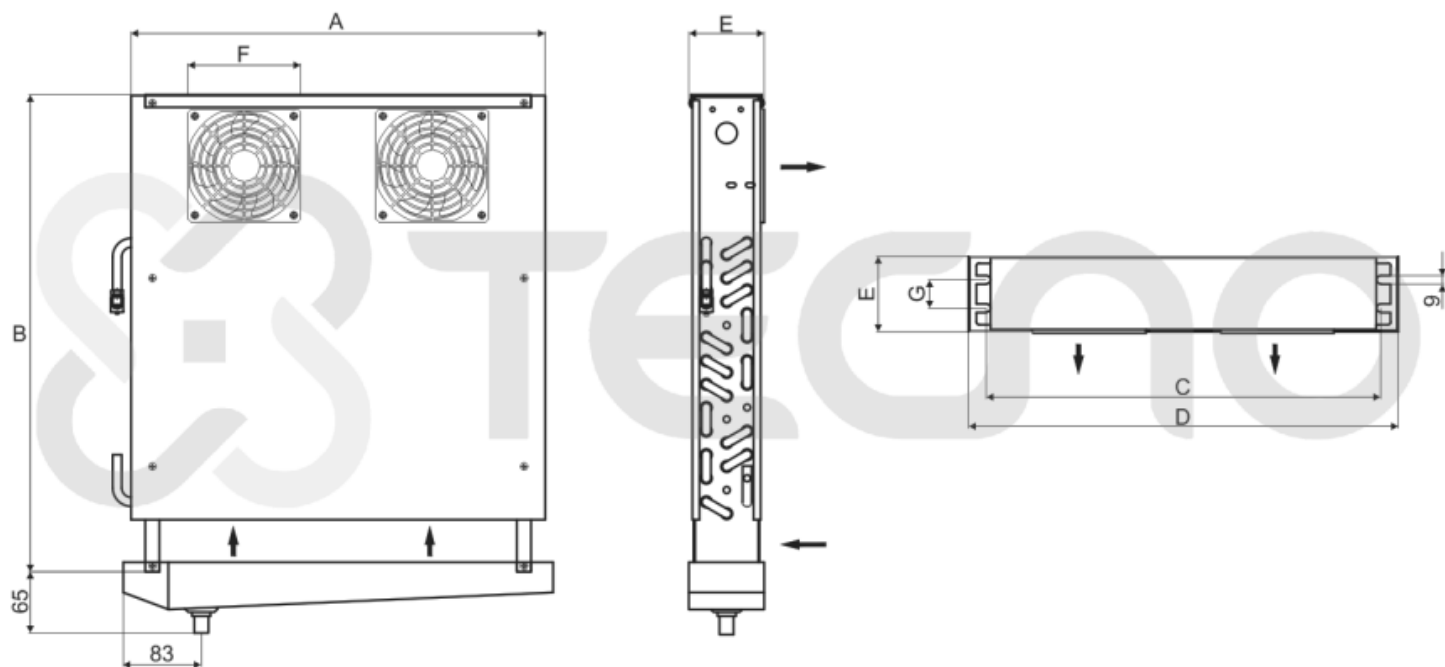

SAMPLE PICTURES



Pictures of some products may vary. Every effort was made to information contained in this catalog are correct. Due to the constant technological developments reserves the right to make changes without notice.