

TECHNICAL DATA




Efficiency R404a:	R404A
Air flow:	817 m ³ /h
Weight:	5 kg
Real Capacity:	1,38 kW
Air Velocity:	2,75 m/s
Altitude:	0 m
Air Inlet Temperature:	35,0 °C
Required Condensing Temp.:	50,0 °C
Real Condensing Temp:	50,0 °C
Desuperheating:	50,0 K
subcooling:	0,0 K
Fluid Flow:	0,008 kg/s
Surface:	2,2 m ²
Internal Volume:	0,4 dm ³
Fin Spacing:	3,17 mm
Circuits:	1
Fins material:	Aluminium
Tubes Material:	Copper
Inlet Header:	1 x 3/8"
Outlet Header:	1 x 3/8"
Dry Weight:	5,00 kg
Sound Power Level \$V\$:	54 dB(A)

FANS

Power:	44 W
Current:	0,2 A
Fans Nr.:	1
Blade Diameter:	250 mm
Lpa at 10m:	23 dB(A)
Power supply:	220V/1Ph/50Hz
Op. Mode :	Delta
Speed:	1357 rpm

DIMENSIONS

A:	390 mm
B:	100 mm
C:	280 mm
D:	300 mm

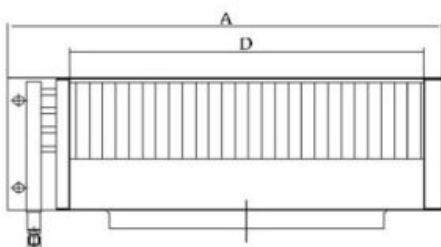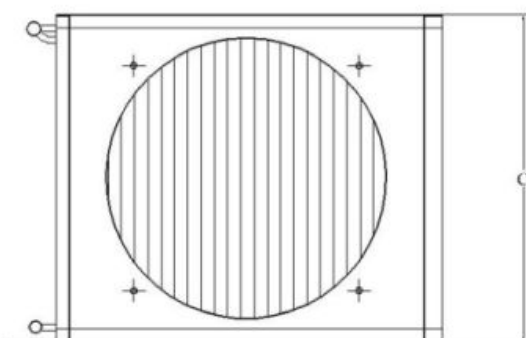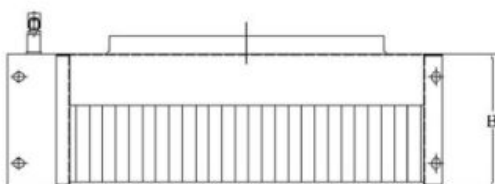

SAMPLE PICTURES



Pictures of some products may vary. Every effort was made to information contained in this catalog are correct. Due to the constant technological developments reserves the right to make changes without notice.