

**TECHNICAL DATA**

|                                                               |                        |
|---------------------------------------------------------------|------------------------|
| Cooling capacity R404A/507 ( te= -8 <sup>0</sup> C ; DT1=8K): | 5,70 kW                |
| Cooling capacity R404A/507 (te= -25 <sup>0</sup> C; DT1=7K):  | 4,10 kW                |
| Exchange surface:                                             | 18,0 m <sup>2</sup>    |
| Tube volume:                                                  | 7,2 dm <sup>3</sup>    |
| Air flow:                                                     | 8920 m <sup>3</sup> /h |
| Air throw:                                                    | 10 m                   |
| Gas coil connection:                                          | 22 Ø mm                |
| Liquid coil connection:                                       | 15 Ø mm                |
| Weight:                                                       | 49 kg                  |

**FANS**

|                 |             |
|-----------------|-------------|
| Diameter:       | 400 Ø mm    |
| Number of fans: | 2           |
| Voltage:        | 230/50 V/Hz |
| Power:          | 490 W       |
| Current:        | 2,20 A      |

**ELECTRIC DEFROST**


|             |             |
|-------------|-------------|
| Voltage:    | 230/50 V/Hz |
| Coil block: | 4x1030 W    |
| Drip tray:  | 1x1030 W    |
| Total:      | 5150 W      |

## THE CORRECTION FACTORS


| Tevap [°C] / DT1[K] | 13    | 12    | 11    | 10    | 9     | 8     | 7     | 6     |
|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| 5                   | -     | 2,146 | 1,904 | 1,592 | 1,361 | 1,228 | 1,195 | 1,010 |
| 4                   | -     | 2,077 | 1,835 | 1,558 | 1,355 | 1,201 | 1,160 | 0,972 |
| 3                   | 2,250 | 1,973 | 1,800 | 1,542 | 1,340 | 1,179 | 1,127 | 0,946 |
| 2                   | 2,181 | 1,965 | 1,766 | 1,527 | 1,316 | 1,140 | 0,999 | 0,912 |
| 1                   | 2,146 | 1,938 | 1,731 | 1,515 | 1,281 | 1,108 | 0,969 | 0,885 |
| 0                   | 2,110 | 1,911 | 1,662 | 1,488 | 1,261 | 1,073 | 0,935 | 0,854 |
| -5                  | 1,835 | 1,696 | 1,488 | 1,350 | 1,177 | 1,013 | 0,865 | 0,727 |
| -8                  | 1,627 | 1,523 | 1,350 | 1,246 | 1,073 | 1,000 | 0,806 | 0,692 |
| -10                 | 1,590 | 1,498 | 1,340 | 1,202 | 1,011 | 0,935 | 0,794 | 0,673 |
| -15                 | -     | 1,385 | 1,246 | 1,142 | 1,004 | 0,865 | 0,762 | 0,658 |
| -20                 | -     | 1,246 | 1,142 | 1,038 | 0,935 | 0,831 | 0,748 | 0,623 |
| -25                 | -     | -     | 1,038 | 0,935 | 0,865 | 0,765 | 0,720 | 0,588 |
| -30                 | -     | -     | -     | 0,900 | 0,796 | 0,727 | 0,623 | 0,544 |
| -35                 | -     | -     | -     | 0,831 | 0,727 | 0,658 | 0,588 | 0,519 |

## DIMENSIONS

|    |         |
|----|---------|
| A: | 1486 mm |
| B: | 510 mm  |
| C: | 460 mm  |
| D: | 1204 mm |
| E: | 602 mm  |

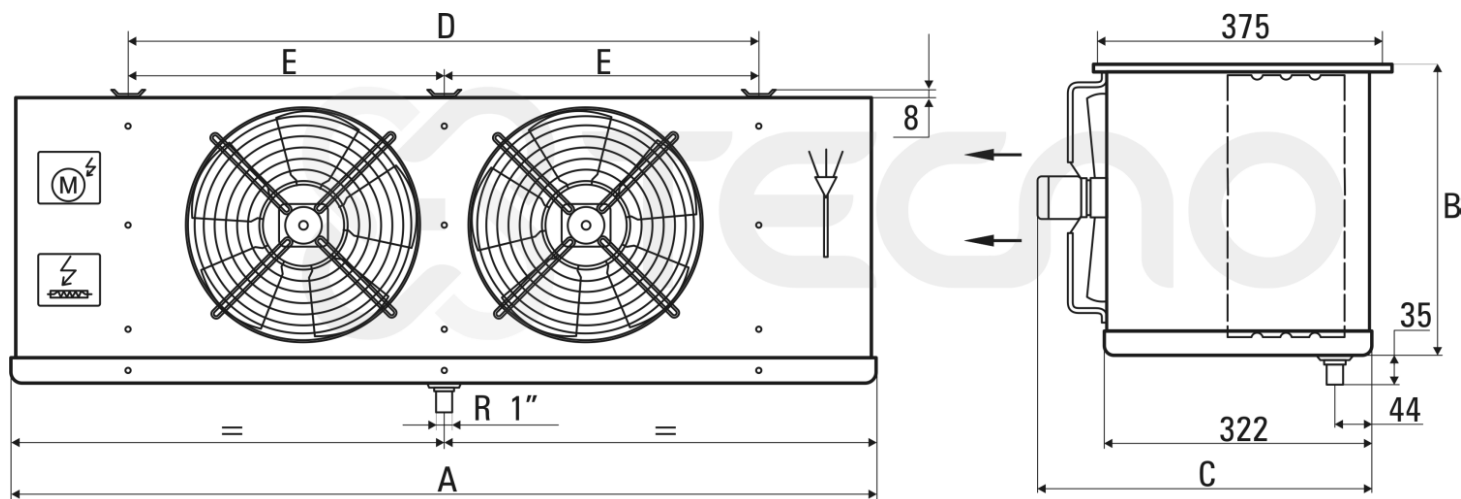

SAMPLE PICTURES

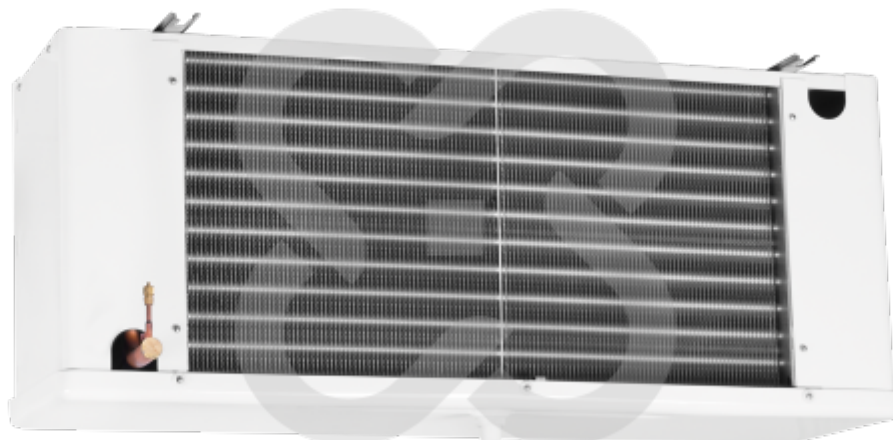

Pictures of some products may vary. Every effort was made to information contained in this catalog are correct. Due to the constant technological developments reserves the right to make changes without notice.